




# bmf<sup>®</sup> Metal Forms

## Super Curb & Gutter Forms

Installing combined curbs and gutters in heights up to 24 inches and widths out to 60 inches, gets into real concrete engineering. BMF is aware of the problems involved, and in the Super line has designed forms to reduce problems to a minimum. The fixed dowels on Super Curb and Gutter forms, mean fast, efficient, in-line setting — and even more efficient stripping. Even more important, it should be possible to remove the division plates easily after initial set-up of the concrete on those jobs which specify no stripping of forms until the concrete has set.

Super forms for combined curb and gutter settings are designed for this condition. No matter how big the division plates, or the type — vertical or battered face, the plates can be pulled without removing the forms by using adjustable hangers to support the face form.

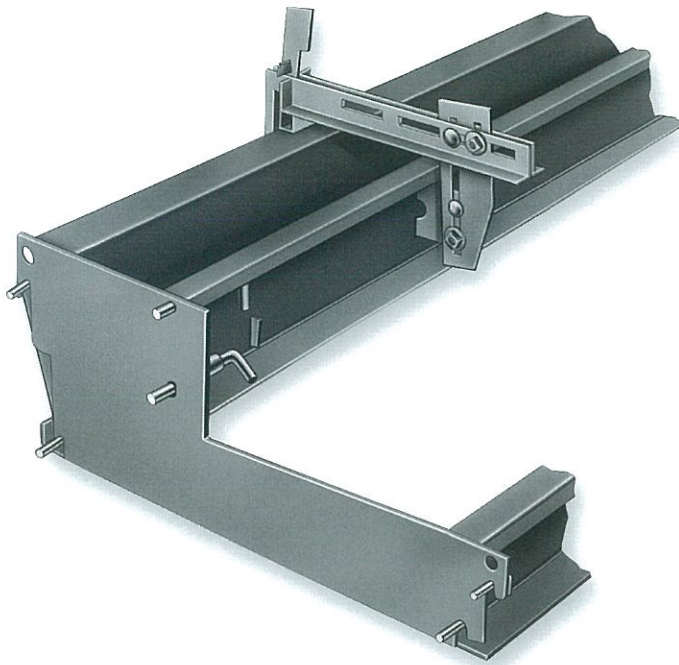

- A - Vertical Face
- B - Battered Face
- C - J Face Vertical
- D - J Face Battered
- E - S Face Vertical
- F - S Face Battered
- G - Inverted J Face Vertical
- H - Inverted J Face Battered

### Specifications

#### Super Gutter Forms

Height, in.	6 to 10
End Connection	two dowels (electro-welded)
Length, ft.	10

#### Super Curb Face Forms



Height, in.	6 to 9
End Connection	two barrel bolts
Length, ft.	10

**Note:** Vertical and battered forms have two holes in bottom flange to permit stacking. See Guide to Ordering.

#### Super Curb and Gutter Division Plates

Curb and Gutter Width, in.	18 to 60
Curb Height, in.	12 to 24
Gutter Height	See Guide to Ordering
Curb Face, Type and Height	Specify Standard shape and see Guide to Ordering.
Adjustable Hanger	one per 10 ft. length

## Jaquith Industries Inc.

600 East Brighton Ave.  
 PO Box 780 • Syracuse, NY 13205-0780  
 315-478-5700 • Fax: 315-478-5707

