JAQUITH INDUSTRIES, INC.
Syracuse, New York 13205 (315) 478-5700 FAX: (315) 478-5707 www.jaquith.com

L-868 Class 1A
Bevel Spacer Ring

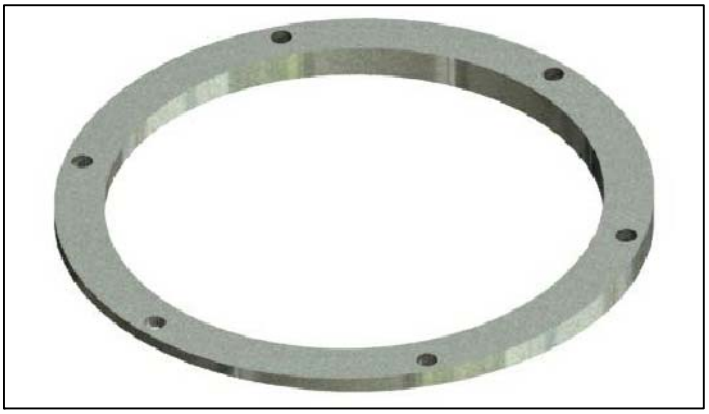

L-868 Class 1A Bevel Spacer Ring

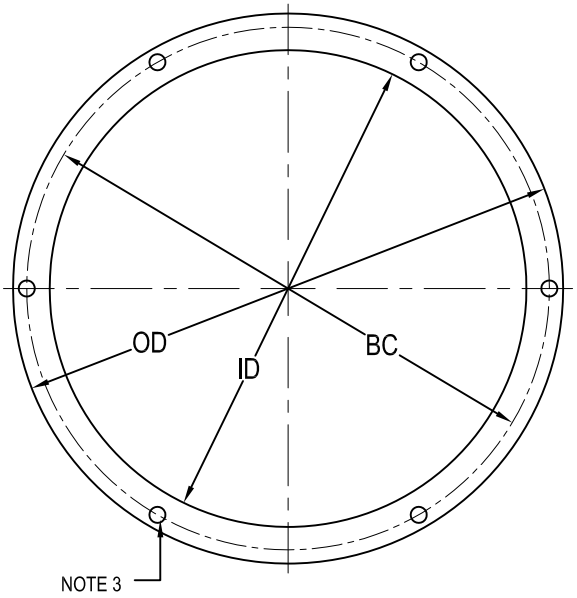

1. Approved and Certified to FAA Advisory Circular AC150/5345-42F L868 class 1A
   Size: A=8", B=12", C=15"
   * A=10" / AC150/5345-42C

2. Bevel Spacer Rings made to Class 1A :
   Galvanized to ASTM-A123/A123M-02

3. (6) 7/16" Ø equally spaced, thru holes

4. Customer to specify thickness at high and low points and their azimuth location to the nearest bolt hole (Must specify if high & low points are aligned with holes or between holes)

5. Available in 1/16" increments
   1/2" Maximum Bevel

6. Spacers above 1/4" thickness are shipped with:
   (6) 3/8"-16 x (Max. Ring Thickness + 1 1/8") Min.
   SS hex head cap screws
   (6) 3/8", 2 piece locking washers
   (JI Pt. No. 10680607)

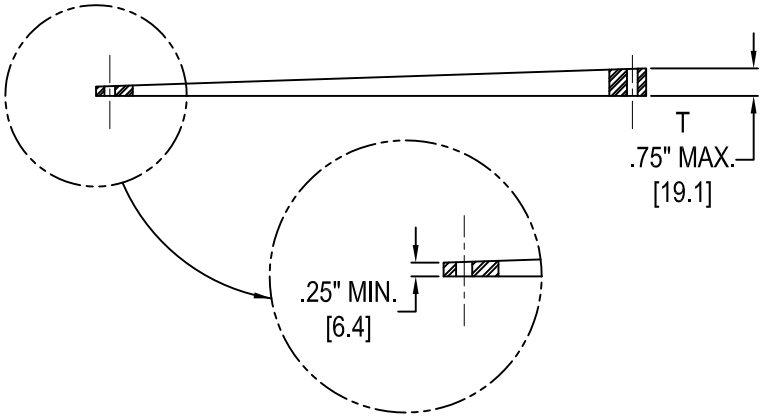

BOTTOM/MIDDLE TO MIDDLE/TOP SECTION SPACER

TYPE	OD	ID	BC
AR5114 10" L868A *See Note 1	10.375"	6"	8.25"
	[263.5]	[152.4]	[209.6]
AR5414 12" L868B	13.50"	9.25"	10.25"
	[342.9]	[235]	[260.4]
AR5514 15" L868C	16"	12.375"	13.25"
	[406.4]	[314.3]	[336.6]

LIGHT INTERFACE SPACER

TYPE	OD	ID	BC
AR0824 8" L868A *See Note 1	8.5"	6.5"	7.25"
	[215.9]	[165.1]	[184.2]
AR5124 10" L868A *See Note 1	10"	8"	9.25"
	[254]	[203.2]	[235]
AR5424 12" L868B	12.5"	10"	11.25"
	[317.5]	[254]	[285.8]
AR5524 15" L868C	15.5"	13"	14.25"
	[393.7]	[330.2]	[362]

[ ] = dimensions in metrics; mm.